


Hooks XL

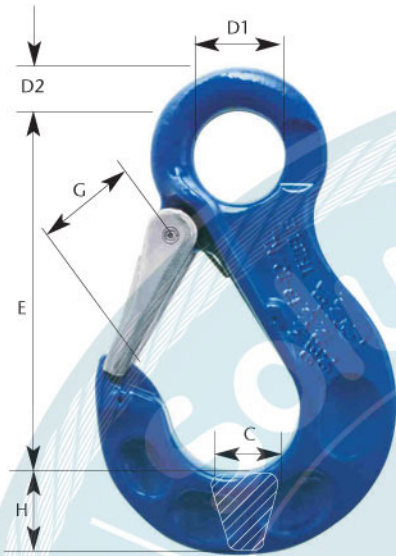

The **Eye Sling Hook TWN1841/1** with its robust forged Safety Latch and its eye is designed to the corresponding nominal size.

The onforged measurement points and maximum admissible values allows an easy check of the hook opening. The Safety Latch is protected by a wear edge of the hook body. Additionally the safety latch has a fixed position due to the forged seat at the tip of the hook. The shape makes the Original of THIELE unique.

100% Magnetic Crack Tested. BG-approved.

Finish: RAL 5002

Trade Size	Article-No.	Working Load Limit [t max]	Dimensions [mm]						Weight approx. [kgs]
			E	D1	D2	G	H	C	
6-XL	F32905	1,40	91	11	21	24	20	17	0,36
8-XL	F32915	2,50	118	14	28	30	25	22	0,78
10-XL	F32925	4,00	145	18	36	37	32	28	1,50
13-XL	F32935	6,70	168	21	42	42	41	35	2,55
16-XL	F32945	10,00	210	27	54	51	50	41	4,65
New 22-XL	F32975	15,00	271	65	30	70	62	54	9,70

Hooks XL


The **Clevis Sling Hook TWN1840/1** with its robust forged Safety Latch and its clevis is designed to the corresponding nominal size. The onforged measurement points and maximum admissible values allows an easy check of the hook opening. The Safety Latch is protected by a wear edge of the hook body. Additionally the safety latch has a fixed position due to the forged seat at the tip of the hook.

The shape makes the Original of THIELE unique.

100% Magnetic Crack Tested. BG-approved.

Finish: RAL 5002

New

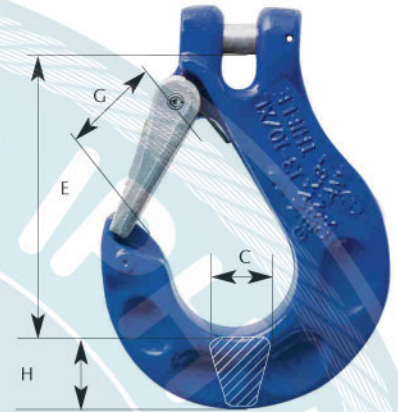

XL

Trade Size	Article-No.	Nominal Size [mm]	Working Load Limit [t max]	Dimensions [mm]				Weight approx. [kgs]
				E	G	H	C	
6-XL	F336050	6	1,40	75	24	20	17	0,36
8-XL	F336150	8	2,50	92	30	25	22	0,75
10-XL	F336250	10	4,00	113	37	32	28	1,40
13-XL	F336350	13	6,70	133	42	41	35	2,50
16-XL	F336450	16	10,00	162	51	50	41	4,40

